

Addendum No. 1
To
REQUEST FOR BIDS
For
Belton Intake Project 2026

Please acknowledge and accept Addendum 1. Except as described below, the original bid document remains unchanged. The bid documents are modified and/or clarified, as follows:

Scope of Work Section 4 Item C- Chemical Injection Line Management

- Survey routing of 1 in black polyethylene line in tunnel.
- Re-route/secure line with standoffs and clamps to at the 3 o'clock position. Stainless hardware clamps may be used in addition to concrete anchors. Spacing every 20ft. This will roughly come out to 10-12 clamps. **Fig 1.** show the layout of our last clamp setup. **Fig 2.** Shows how the 1-inch black poly line is to be terminated with no kinks in line. A long sweep with an open end going with the flow of raw water. **Fig 3** shows a better close up of the long sweep. The three black marks resemble clamps.

FIG. 1



FIG. 2.

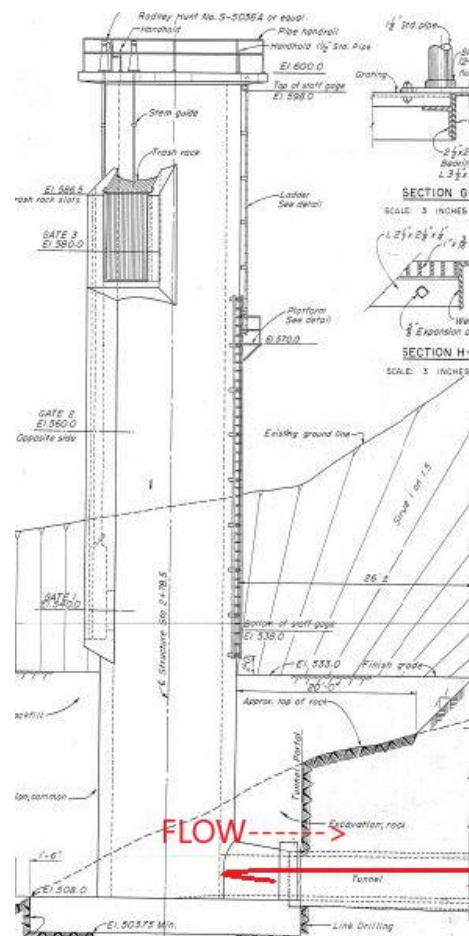


Fig 3.

